(11) EP 1 256 316 A1

(12)

FUROPEAN PATENT APPLICATION

(43) Date of publication: 13.11.2002 Bulletin 2002/46

- (51) Int Cl.7: **A61B 5/22**, G01C 22/00, A63B 22/00
- (21) Application number: 01201653.1
- (22) Date of filing: 07.05.2001
- (84) Designated Contracting States:
 AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
 MC NL PT SE TR
 Designated Extension States:
 - Designated Extension States: AL LT LV MK RO SI
- (71) Applicant: Move2Health B.V. 9801 CS Zuidhorn (NL)
- (72) Inventor: Damen, Erik Petrus Nicolaas 9801 CS Zuidhorn (NL)
- (74) Representative: Aalbers, Arnt Reinier
 De Vries & Metman
 Overschlestraat 180
 1062 XK Amsterdam (NL)

Remarks:

A request for correction of Figures 1A and 2A has been filed pursuant to Rule 88 EPC. A decision on the request will be taken during the proceedings before the Examining Division (Guidelines for Examination in the EPO, A-V, 3.).

- (54) Portable device comprising an acceleration sensor and method of generating instructions or advice
- (57) The Invention pertains to a portable device comprising a housing, a display, a storage medium, at least one accoleration sensor, means for calculating an activity parameter based on the signal generated by the accoleration sensor, storing the calculated parameter in
- the storage medium, and showing the same in the display. The said parameter is the Physical Activity Index (PAI) or a derivative thereof.

10001] The invention pertains to a portable device comprising a housing, a display, a storege medium, at least one acceleration sensor, means for calculating an activity perameter based on the signal generated by the acceleration sensor, storing the calculated parameter in the storage medium, and showing the seme in the display. The invention further pertains to a method of generating instructions or advice on how to increase physical activity as well as to a computer program comprising activity.

program code means for performing all the steps of the

said method.

[0002] An example of a device as described above is known from e.g. United States Patent 6,788,655, which relates to an exercise emount measuring device. This particular device calculates and displays total consumed calories, a remaining larget calorie value, and a life activity index, which is classified into e.g. one of three ranks (1 light, 11 "medium", and ii 'a little heavy). 20 To calculate these parameters, gender, age, height, and weight should be inputted by means of switches on the

device.

[0003] Nowadays, many people are aware of the importance of healthy nutrition and sufficient exercise, yet appear unable to accomplish the seme.

[0004] It is an object of the present invention to provide a device which stimulates (daily) physical ectivity through relatively uncomplicated and user-friendly

[0005] To this end, the device according to the invention is characterised in that the sald parameter is the Physical Activity Index (PAI) or a derivative thereof.

[0006] It was surprisingly found that the PAI can be established readily, because the relation between the 35 PAI and a processed signal or samples of a signal of the acceleration sensor is substantially linear. PAI can be established for instance by subtracting an offset from the processed signals or sample and multiplying the result with a constant. Such a constant is preferably de- 40 termined by measuring the oxygen consumption of several subjects. Personal data of a user, such as gender, age, height, and weight, need not be inputted thus further enebling straightforward construction and enhancing ease of use. Also, the PAI is universal in that e.g. a 45 PAI of 1.5 Indicates a sedentary lifestyle independent of personal data, i.e. for a woman in her early twentles and a middle-aged man alike. Thus, suitable instructions or advice on how to increase physical activity cen be readily selected based on the measured PAI end competition between e.g. colleagues or family members is being provoked.

[0007] It is preferred that the device comprises an input/output connector which enables the transfer of at least some of the stored information to a compute that contains or is connected or connectable to an electronic database and/or an electronic algorithm.

[0008] The method of generating instructions or ad-

vice according to the invention involves electronically obtaining, from an individual, the Physical Activity Index (PAI) or a derivative thereof and selecting, based on this parameter, one or more instructions or advice components from a database. It is preferred that the said parameter is downloaded by a remote server system, which selects, based on this parameter, one or more instructions or eavier components from a database and wherein the selected items or a processed version thereof are subsequently unjoaded.

[0009] The invention further portains to a computer program comprising program code means for performing all the steps of this method. The computer program product may of course comprise both mobiles intended for implementation on a remote service system, e.g. located at a service provider, and modules intended for mobiles intended for intended for mobiles intended for intended for mobiles intended for mo

[0010] The Physical Activity Index (PAI), sometimes also referred to as Physical Activity Level (PAL), can be established by dividing the Total Energy Exponditure (TEE), i.e. the amount of energy that is consumed by a person during a selected period of time, e.g., a day, by 5 the Basal Metabolic Rate (BMR), i.e. the amount of energy that is consumed by a person ying still on a bad for the same period of time. Paperson lying still on a bad for the same period of time. Typically, the PAI has the value of 1.0 when the person is lying on a bad, 1.5 when the person leads a sedentary life and 2.0 when the person has enective lifestyle.

[0011] The invention will now be explained with reference to the drawings in which a preferred device and method according to the present invention are schematically depicted.

[0012] Figures 1A to 1C show respectively a front, rear and side view of a portable device according to the present invention.

[0013] Figures 2A and 2B show a cradle for receiving the device according to figure 1B.

40 [0014] Figure 3 is a block diagram of electrical circuitry for use in the device according the invention.

[0015] Figure 4 is a block diagram of preferred electrical circuitry for use in the device according the invention

[0016] Figure 5 is a flowchart of a website where the method according to the invention has been implemented.

[0017] Figures 1A to 1C show a preferred embodiment of the device according to the present invention.

which embodiment will be referred to as activity monitor

1. The activity monitor 1 comprises a injection moulded
housing 2 of a thermoplastic material such as PBT, an
Liquid Crystal Display (LCD) 3, and four buttons 4 to 7.
The rear side of the monitor comprises a bayonot catch

55 8 engaging a clip 9 for attaching the monitor 1 to an item of clothing and a ceviry for accommodating a battery, which cavity is closed by meens of a cover 10. It further comprises three I/O connectors, in this case butt contacts 11, 11, 11 which, upon placing the monitor in a complementary radie, e.g., a docking station 12 shown in Figures 2A and 2B, contact three connectors 13, 13'; in the docking station 12 and enable the transfer of information, e.g. by means of an RB-229 protocol, bottween the monitor 1 and a computer to which the docking station 12 is connected.

3

[0018] The LCD 3 features the time, the numerical value of the Physical Activity Index (PAI) averaged over one or more selectable periods of time, and a segmented bar to graphically displey the PAI within a specific range, e.g. from 1.0 to 3.0, in a number of discrete steps, e.g. of 0.1.

[0019] Instead of PAI, derivatives of PAI, such as (PAI - 1) x 100, can be employed. When using this particular 15 derivative, a value of 0 means that the user has been at rest (at least for the selected period of time for establishing PAI), whereas a value of e.g. 100 indicates an active lifestyle.

[0020] Buttons 4 to 7 serve to display and adjust time 20 (respectively button 4 and buttons 5/6) and switch between displaying the PAI over e.g. the last day and the last week (button 7).

[0021] Figure 3 shows a block diagram of an electrical circuitry for use in the activity monitor 1. The circuitry in this example comprises a single one-dimensional accelerometer 14, e.g. a so-called uniaxial piezo-electric accelerometer, which registers body movement of a wearer of the monitor 1 in the longitudinal direction or the antero-posterior and longitudinal directions. To achieve 30 the latter, the accelerometer 14 is positioned at an angle of approximately 45 degrees to a horizontal position (as shown in figures 1A and 1B) of the monitor 1. The aforementioned clip 9 in figure 1C facilitates attachment of the monitor 1 to e.g. the belt of a wearer in such a way 35 as to ensure a substantially horizontal position during most of the time, especially when the wearer is standing upright. As a matter of course, it is also possible to employ e.g. three sensors 14 (as depicted by dotted lines). [0022] The accelerometer 14 generates, dependent on the movements of a wearer, which typically occur in a frequency range from 0.5 to 16 Hz and with an amplitude of less than 5G, an analogue signal, e.g. a voltage fluctuating in a range from 0mV to 10mV. This signal is subsequently amplified by means of amplification circultry 15 and converted to a digital sequence of numbers by means of an A/D converter 16 with a sample frequency of e.g. 32 Hz. A dedicated microprocessor 17 calculates a so-called running average of the absolute value of the acceleration data over e.g. the last day and the last week. The running average is calculated by adding the absolute value of the most recent sample to an accumulated sum and subtracting the average of this sum over the selected period of time. The average of the accumulated sum over the selected period of time equals 55 the running average. To obtain the PAI the running average is multiplied by a metabolic factor reflecting the average oxygen consumption of relatively large number

of experimental subjects and a sensor calibration factor. f00231 Thus, to calculate the average value of the PAI over a certain period of time, e.g. a day, the signal can be processed e.g. as follows. The absolute value of the signal, which fluctuates within the said range of from 0mV to 10mV, is amplified by an amplification factor and sample by the A/D converter 16, which then generates a sample value e.g. an integer in a range from 0 to 255. Subsequently, the running average of the sample values is calculated and multiplied by a metabolic factor, which can be established by comparing the said running average with true PAI values obtained by measuring oxygen consumption in one or more subjects in a manner which is known in itself. It is further preferred to employ a calibration factor to compensate for variations specific to the sensor in hand. For piezo-electric sensors variations were found to be ± 20% and, accordingly, the calibration factor is preferably in a range from 0.8 to 1.2.

[0024] The microprocessor 17 stores the calculated PAIs in a memory 18, such as a random access memory chip, and shows the information, selected by the wearer by means of the appropriate button 4, in the display 3. [0025] Figure 4 comprises an advantageous embodiment, wherein the circuitry comprises a rectifier 19 which comprises four diodes and an operational amplifier and is connected to the output of the ampifier 15. An integrator 20, which comprises a capacitor circuit, is connected to the output of the rectifier 19 and accumulates the analogous signal from the same. Instead of sampling the acceleration at a relatively high rate of e. g. 32 Hz, one can now reduce this rate to e.g. 1 Hz and, accordingly, significantly lower the power consumption of the activity monitor 1 and extend battery-life. A further advantage resides in that the PAI can be established with a high accuracy even when an low accuracy A/D converter (e.g. 8 bits) is being used.

[0029] Although the activity monitor 1 can be used as a stand-alone entity, which provides its user with accurate information of his or her activity, either relative to past activity of the user himself or relative to that of other people e.g. by means of the table or chart reflecting syncial Pals for specific persons (in terms of e.g. profession, sport, age, gender et c.), it is preferably used in conjunction with a personal computer (PC) and/or a remote computer, e.g. a sever system. In that case, the user can compare his or her PAI with that of numerous other users and automatically select instructions or advice components from a database or calculate a new PAI opail by means of an algorithm.

50 0027] To this end, the docking station 12 is connected to a PC or a remete server system in which software has been installed which proferably recognises the presence of the activity monitor in a known manner and performs a number of actions, e.g. download a 32-bit download FAI values of e.g. the last months, synchronise the clock of the activity monitor 1 and that of the PC or server system, and upload the presont docking

data

[0028] A flowchart of a preferred website, which is installed on the said server system and which can be accessed via the internet by the user with a web browser, such as Microsoft Explorer or Netscape Navigator or similar (future) means, is depicted in figure 5 and comprises a home page 0.0. This home page 0.0 shows several menus, which provide access to subpages of the website concerning, inter alla, the host, products of the host, health issues, registration, and login. The remainder of the home page 0.0 may comprise news items, advertisements, pictures, and the like.

5

[0029] A personal coach page 1.0 forms the kernel of the website. This page 1.0 can be accessed via a registration page 1.1 or login pages 1.8 and 1.9. The former 15 page 1.1 comprises an electronic form for gathering information from users of the activity monitor 1 who visit the website for the first time. Such information may comprise the name, address, city, country, weight, height, age, gender, and weight goal, and will be used by the 20 personal coach page 1.0 to generate instructions and personalised advice. The registration page 1.1 further provides a username and password, which enables users to by-pass registration page 1.1 and enter the personal coach page 1.0 directly through login pages 1.8 25 and 1.9, and links the username information to the aforementioned unique address code. During login, the system compares the downloaded ID to the ID in the server so as to provided automatic login. The last docking date and most recent PAI values are used to update the datahase

[0030] The personal goals of a user of the activity monitor 1 in terms of a desired activity level and a desired weight are calculated on a personal goals page 1.7. Such calculations can be based on the personal da- 35 ta of the customer, e.g., weight, height, age, and gender, as well as on other personal parameters that can be changed and/or updated on a preferences page 1.4 and/ or on the average PAI of the first week and/or a numerical parameter representing the motivation of the customer and determined by means if a questionnaire page 1.6. Upon approval of the user, the calculated goals are set to be reached at the end of a coacing period of e.g. six months. During this period, the personal coach page 1.0 provides information concerning the personal history of the user in terms of activity and body weight and advice comprising suggestions on a preferred PAI selected on selector page 1.5 and activities required to reach the set personal coals, e.g. half an hour of walking every day or 5 km running every day.

[0031] Finally, the website comprises a links page 2.0 containing links to interesting pages that can help reach the personal goals, such a as a link to go to a page containing recipes which support a healthy lifestyle, a link to a service providing direct access to an Instructor or 55 dietician, and a link containing information on regional activities. If a goal is reached, the personal coach page 1.0 may start another page, which shows a message

congratulating the user or sends an actual congratulations post card to the users' address. A special printer on the system could do this automatically.

[0032] The invention is not restricted to the above described embodiments which can be varied in a number of ways within the scope of the claims. For instance, the display device can be equipped with a rechargeable battery or even means for generating energy, such as a (piezo)electric generator which converts movement into electrical energy.

Claims


- 1. Portable device (1) comprising a housing (2), a display (3), a storage medium (18), at least one acceleration sensor (14), means (17) for calculating an activity parameter based on the signal generated by the acceleration sensor (14), storing the calculated parameter in the storage medium (18), and showing the same in the display (3), characterised in that the said parameter is the Physical Activity Index (PAI) or a derivative thereof.
- Portable device (1) according to claim 1, wherein the Physical Activity Index or a derivative thereof is calculated by multiplying an average of a processed signal or samples of a signal of the acceleration sensor (14) with at least one constant.
 - 3. Portable device (1) according to claim 2, wherein the said average is at least multiplied by a metabolic factor.
- 4. Portable device (1) according to claim 2 or 3, wherein the said average is at least multiplied by a calibration factor which depends on the sensor (14).
- 5. Portable device (1) according to any one of the preceding claims, wherein the device (1) further comprises a rectifier (19) for rectifying the signal generated by the acceleration sensor (14) and a capacitor (20) which is charged by the rectified signal.
- 45 6. Portable device (1) according to any one of the preceding claims, wherein the device (14) comprises an input/output connector (13, 13', 13") which enables the transfer of at least some of the stored information to a computer that contains or is connected or connectable to an electronic database and/or an electronic algorithm.
- 7. Portable device (1) according to any one of the preceding claims, wherein the device (1) comprises a clip (9) for attaching the device (1) to an item of clothing, such as a belt, of a wearer such that rotation of the device (1) with respect to the wearer is substantially avoided and wherein the sensor (14)

is positioned at an angle in the range from 30 to 60 degrees to the horizon when the wearer is standing upright.


- 8. A method of generating instructions or advice on show to increase physical activity and tailored to objective needs and/or preferences of an individual, which method involves electronically obtaining a parameter concerning that individual and selecting, based on the said parameter, one or more instructions or advice components from a database, wherein the said parameter is the Physical Activity Index (PAI) or a derivative thereof.
- Method according to claim 8, whorein the said parameter is uploaded to a remote server system, which selects, based on this parameter, one or more instructions or advice components from a database and wherein the selected items or a processed version thereof are subsequently downloaded.
- A computer program comprising program code means for performing all the steps of claim 8 or 9 when said program is run on a computer.
- 11. A computer program product code means stored in a computer readable medium for performing the method of claim 8 or 9 when said program product is run on a computer.


40

45

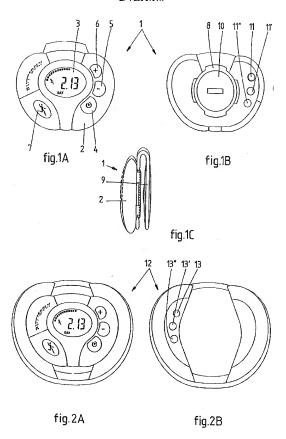

6

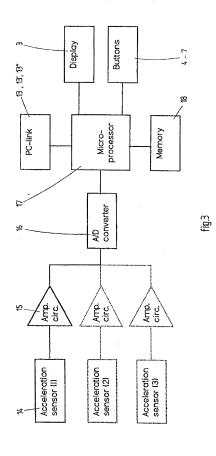

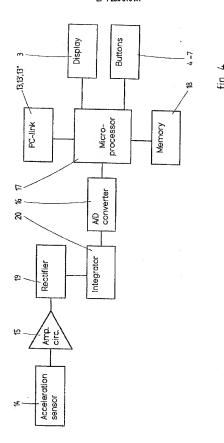

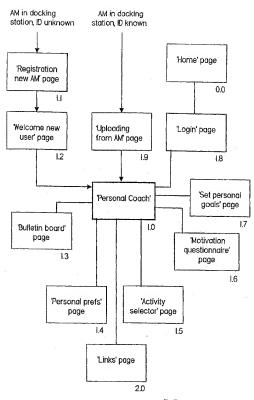


fig.5



EUROPEAN SEARCH REPORT

Application Number EP 01 20 1653

ategory	Citation of document with indicator of relevant passages	, where appropriate.	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.CI.7)	
	US 6 135 951 A (WADE TEI 24 October 2000 (2006-10 * column 5, line 49-53 ' * column 28, line 15-26 * column 30, line 10-30 * figures 2,12 *	1-3,8-11	A61B5/22 G01C22/90 A63B22/90		
, ;	Tigures 2,12		6,7		
Y	WO 96 29007 A (WALKER D/ 26 September 1996 (1996 * abstract; figures 1-3 * page 15 *	-09-26)	6,7		
(EP 0 797 169 A (OMRON 7 CO) 24 September 1997 (* abstract; figures 22, * page 9, line 7-40 *	1997-09-24)	1-3		
X	US 5.989 200 A (HASEGAW) 23 November 1999 (1999- * column 2, line 4-16 * * column 2, line 29-42	11-23}	1-3	TECHNICAL FIELDS SEARCHED (Int.Cl.7)	
	* figures 1-5 *			A61B G01C	
X	WO 00 52604 A (STAYHEAL 6 September 2000 (2000- * page 6, line 23 - page figure 1 *	8-11	A63B		
х	US 5 976 083 A (WADE TEL 2 November 1999 (1999-1 * column 5, line 1-59;	1-02)	8-11		
	The present search report has been do	swn up for all claims			
	Pince of search	Date of completion of the season		Exemple	
	BERLIN	24 September 200	1 Jor	isson, P.O.	
CATEGORY OF DIFFO DOCUMENTS X : particularly relevant if sixture above Y : particularly relevant if combined with another document of the same cotogory		E : earlier patent do	T, theory or principle underlying the invention E: earlier patient document, but published on or stire the filling disk. D: cocument could in the application L: document could for orther reasons.		
X : par Y : par dor	ticularly relevant it combined with another	D ; document about			

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 01 20 1653

This areax lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as continues in the European Patent Office EEP file on The European Patent Office is no way lable for these particulates which are merely given for the purpose of information.

24-09-2001

	Patent documer tad in search rep		Publication date		Patent family member(s)	Publication date
is 6	5135951	A	24-10-2000	US	5976083 A	02-11-1999
40 9	629007	Α	26-09-1996	AU	5010896 A	08-10-1996
				MO	9629007 A1	26-09-1996
				GB	2313672 A ,B	03-12-1997
P 6	797169	Α	24-09-1997	JP	9292219 A	11-11-1997
				EP	0797169 A1	24-09-1997
				US	6254513 B1	03-07-2901
				CN	1165573 A	19-11-1997
				MO	9710557 A1	20-03-1997 26-08-1997
				JP JP	9223214 A 9138119 A	27-05-1997
				JP	3130113 W	27-03-1337
JS S	5989200	Α	23-11-1999	CN	1133155 A	16-10-1996
				EP	0700661 A2	13-03-1996
				JP	8126632 A	21-05-1996
				KR KR	195366 B1 205764 B1	01-07-1999
				KR	205703 B1	01-07-1999
				US	5788655 A	04-08-1998
				JP	8308820 A	26-11-1996
				JP	8131425 A	28-05-1995
in 1	9052604	A	08-09-2060	AU	3726500 A	21-09-2000
,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	0002004			MO	0052604 A1	08-09-2000
US !	5976083	Α	62-11-1999	US	6135951 A	24-10-2000

For more details about this annox : see Official Journal of the European Patent Office, No. 12/82